

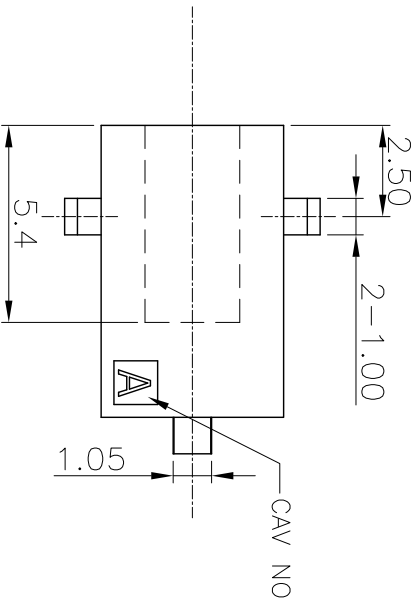

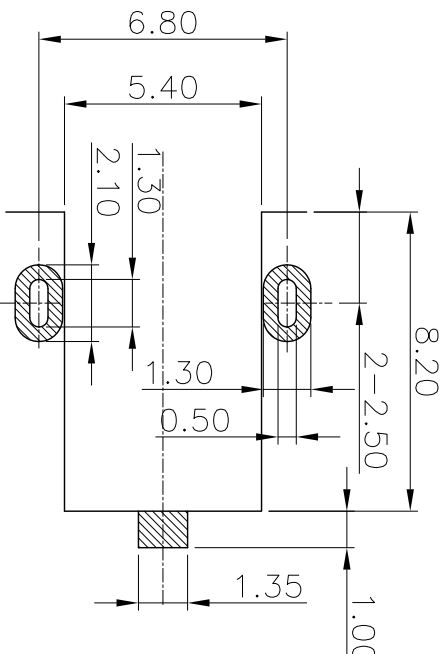


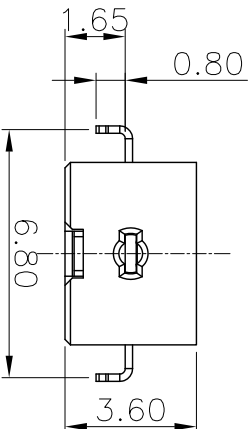


1. Material
- 1.1 Housing: PA9T, BLACK UL 94V-0.
 - 1.2 Terminal: Copper Alloy, Gold Plated
2. Electrical Performance
- 2.1 Rated Voltage: 30V AC
 - 2.2 Rated Current: 0.5A
 - 2.3 Contact Resistance: 100mΩ Max.
 - 2.4 Insulation Resistance: 100MΩ Min.
 - 2.5 Dielectric Strength: 500V AC
3. Mechanical Performance
- 3.1 Insertion Force: 2.22-22.2N
 - 3.2 Withdrawal Force: 2.22-22.2N
 - 3.3 Durability: 5000 Cycles
4. Operating Temperature: -25° C To +85° C

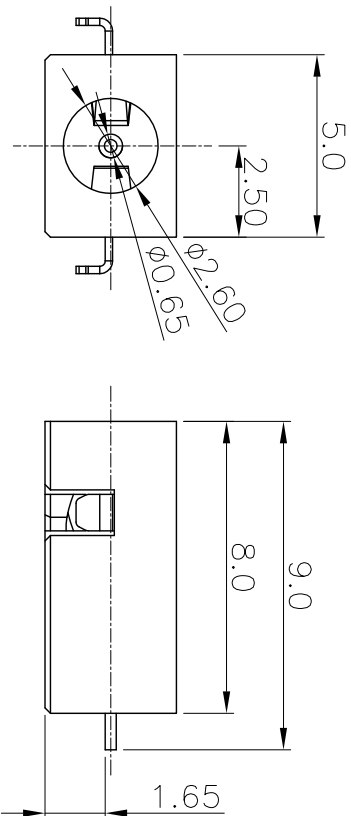

SCHEMATIC

PCB LAYOUT TOP VIEW
TOLERANCES: ±0.05

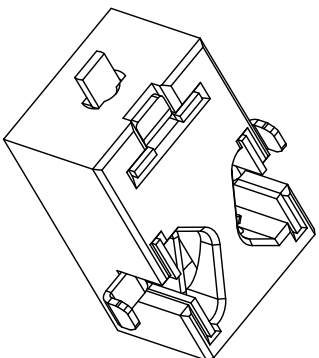

REVISIONS				SHEET	REV	SCALE	NA	DESIGNER	Pate	9.6.10	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN mm		TITLE:	
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE										
			INITIAL RELEASE	2004	1/1	A	CHECKED	Mona	9.6.10		DIMENSION		TOLERANCE	PART NO.
											.XX	±	0.15	
											.X	±	0.25	
											ANGULAR	±	0.50	DC055CN
											UNIT	5°		
														DWG. NO.

深圳市伊川电子有限公司
SHENZHEN YICUAN ELECTRONICS CO., LTD

DC JACK DIP 1.65

DC055CN

DWG. NO.