
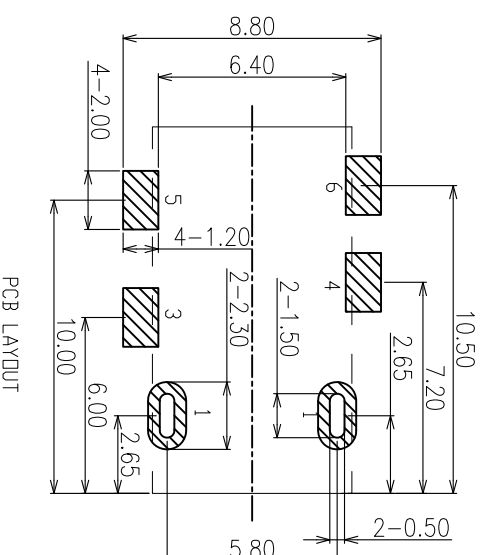



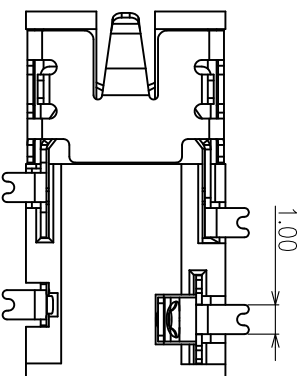
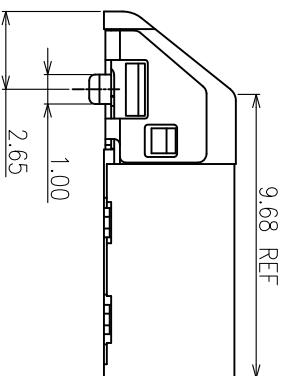
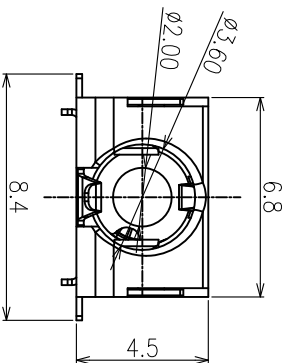


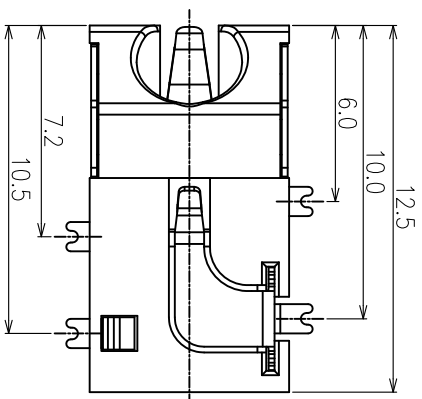

PCB LAYOUT

- Material/Plated
- 1.1 Housing: HIGH TEMPERATURE PLASTIC, BLACK UL 94V-0.
- 1.2 Terminal: Copper Alloy, Gold Plated
2. Electrical Performance
- 2.1 Rated Voltage: 30V AC
- 2.2 Rated Current: 0.5A
- 2.3 Contact Resistance: 100mΩ Max.
- 2.4 Insulation Resistance: 100MΩ Min.
- 2.5 Dielectric Strength: 500V AC
3. Mechanical Performance
- 3.1 Insertion Force: 2.22-22.2N
- 3.2 Withdrawal Force: 2.22-22.2N
- 3.3 Durability: 5000 Cycles
4. Operating Temperature: -25° C To +85° C

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN mm				深圳市伊川電子有限公司 SHENZHEN YICUAN ELECTRONICS CO., LTD			
SCALE		N/A		DESIGNER		Peter		9. 6. 10		TITLE: Ø3.5mm PHONE JACK	
REV		B		CHECKED		Mona		9. 6. 10			
SHEET		1/1		APPROVE		Jona		9. 6. 10		PART NO. Pj3511V	
REV.		ECN NO.		LOCATION		DESCRIPTION		DATE			
B						新機生产		20140113		DWG. NO.	